§ 172.550

"WHEN WET" must be at least 25 mm (1.0 inches) high. The symbol, text, class number and inner border must be white.

[Amdt. 172-123, 56 FR 66263, Dec. 20, 1991]

§172.550 OXIDIZER placard.

(a) Except for size and color, the OXI-DIZER placard must be as follows:




49 CFR Ch. I (10-1-12 Edition)

(b) In addition to complying with §172.519, the background color on the OXIDIZER placard must be yellow. The symbol, text, division number and inner border must be black.

[Amdt. 172–123, 56 FR 66263, Dec. 20, 1991]

§ 172.552 ORGANIC PEROXIDE placard.

(a) Except for size and color, the OR-GANIC PEROXIDE placard must be as follows:

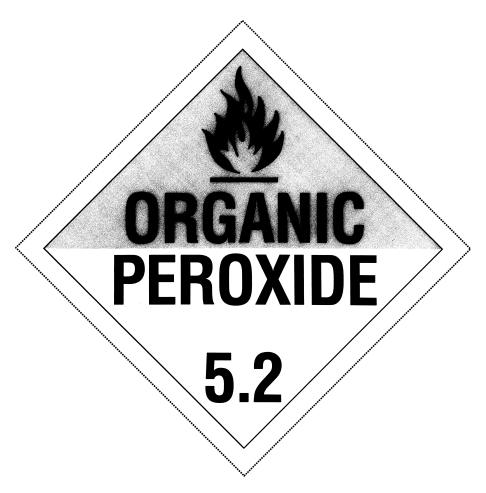

(b) In addition to complying with §172.519, the background on the OR-GANIC PEROXIDE placard must be red in the top half and yellow in the lower half. The text, division number and inner border must be black; the symbol may be either black or white.

(c) For transportation by highway, a Division 5.2 placard conforming to the specifications in this section in effect on December 31, 2006 may continue to be used until January 1, 2014.

[71 FR 78628, Dec. 29, 2006, as amended at 76 FR 43528, July 20, 2011]

§172.553 [Reserved]

§172.554 POISON placard.

(a) Except for size and color, the POI-SON placard must be as follows: